

Ασύρματη Ενδοεπικοινωνία

Wireless Intercom

Instruction Manual


MODEL:CI05



Thanks for purchasing this MULTI-channel wireless intercom. This is an "INDEPENDENT" intercom system. All the safety and operating instruction should be read before the appliance is operated and retained for future reference.

NO: INST-CI05-V0

01 HOST

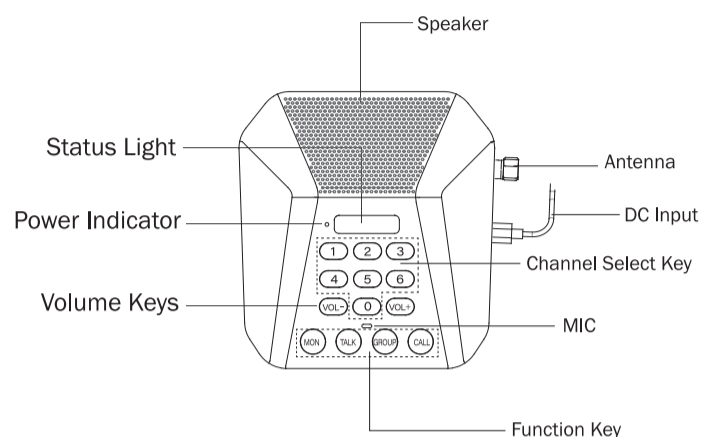


- ◆ **Installation mode:** Desktop, Wall-mounted, Handheld.
- ◆ **Power:** DC 5V/1A by TYPE-C charging
- ◆ **The antenna:** Receive/send signals
- ◆ **MIC:** Microphone (the best talking distance is within 0.5 meter)
- ◆ **Status Light:** Status light turns green means receiving signal,status light turns red means sending signal.

02 Basic Information:

◆ ABC code selection:

Turn the ABC code selection switch to choose code A,B or C, each code with 7 channels from 0 to 6. The factory setting is Code A . If all channels of Code A are in use or the frequency is interfered, switch to Code B or Code C for stable signal.

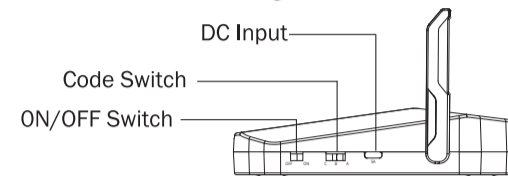

◆ On/Off key: Switch to turn on or off.

◆ Channels: 21 channels for choose.(Each code with 7 channels from 0 to 6)

- 1: Select the code and channel you want to set.
- 2: Holding the channel key for 5 seconds.
- 3: When the key lighting green that means the channel has been selected successfully.

◆ Volume key: Press "vol-" or "vol+" to adjust the volume level. 6 levels for available. (the factory setting is level 4)

◆ Monitor: Press the MONITOR key and the monitor key's indicator will turn red.



If you want to monitor the baby's room, you need to set the same code & channel as the baby's room, and press the monitor key.



Press MONITOR key, it can keep monitor status for 24 hours, then you can hear the baby's voice allday.

◆ CALL: Press the CALL key, other devices with the same code & channel will be ringing to remind them there was someone calling.

◆ TALK:


1. Select the code and channel you will talk;
2. Holding the "TALK" key to start a talking (The effective reception distance of the device is 5-35cm.) the digital display will turn red when talking;



Press & Hold the TALK key to speak, release after finish speaking

Notes:

- 1: Holding the TALK key when you want to speak to another user.
- 2: DO NOT holding the TALK key on both sides at the same time. You will not be able to hear the other user's voice if both sides are holding the TALK key at the same time.

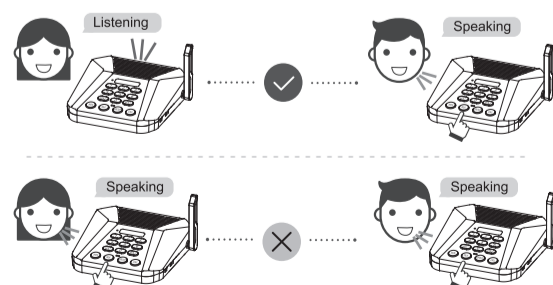

◆ GROUP: Holding the GROUP key when the key indicator turn red, you can make a call to other intercoms with the same channel. To reply the Group conversation also requires holding the "Group"key.

◆ NOTE: The default group channel is 0 for each code,you need to make sure all the host machine are on the same code before making a group call.


◆ Change Group channel

The default GROUP channel is 0. If you find that the GROUP number is being used or interfered . You can change the GROUP channel as follows:

- 1: Holding the "vol-" key for 5 seconds. When you hear the "beep" sound, the "vol-" key and the original group number will blink .
- 2: Select the number (0-6) you want to set.
- 3: When the "vol-" and selected number key blink, the setting finished.

Eg:

Code A
GROUP channel 0

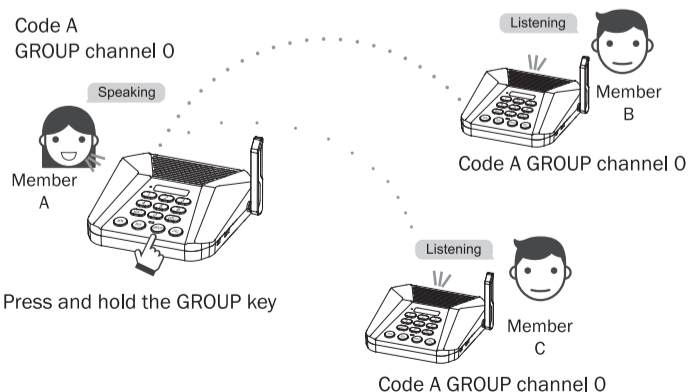

03 TROUBLE SHOOTING

◆ Faults during start-up:

1. Ensure the power cable is connected and working properly.
2. Verify AC/USB charge adapter and make sure using 5V/1A adapter.

◆ Noise, no sound or other sound interference:

1. The distance between two devices should be over 2 meters and adjust the volume to decrease interference.
2. Verify all intercoms are at least 1 meter (3ft) away from any high current electrical equipments such as motors, blowers, heaters or other radios, etc.
3. Do not put the power cable on the surface of the device.
4. Change to a new channel number.

◆ Connection failure or the receiver can not hear anything:

1. Check whether all device are set to the same A/B/C privacy filters.
2. Verify all intercoms are at least 1 meter (3ft) away from any high current electrical equipments such as motors, blowers, heaters or other radios, etc.

04 Packing list

Accessories	QTY
Host Intercom	1
Adapter	1
Charging Cable	1
Instruction Manual	1